

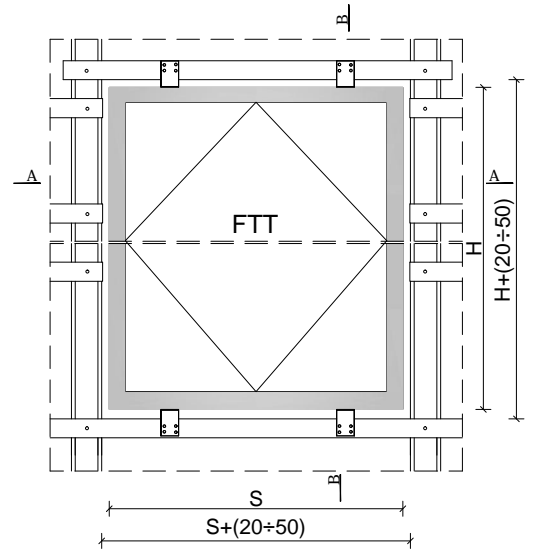
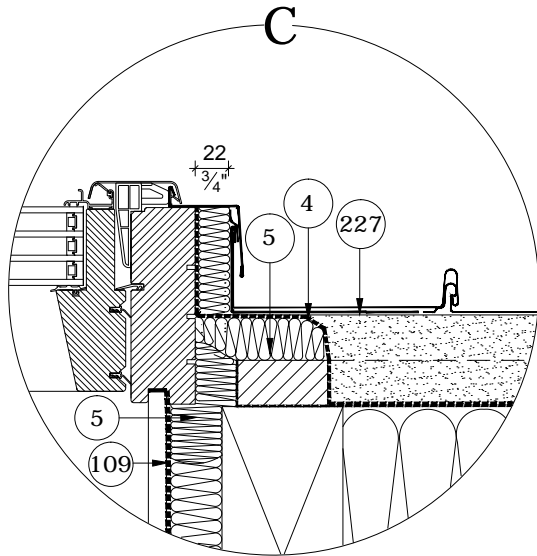
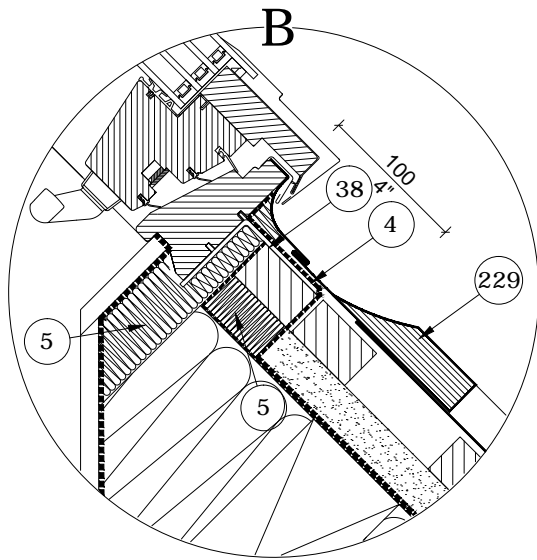
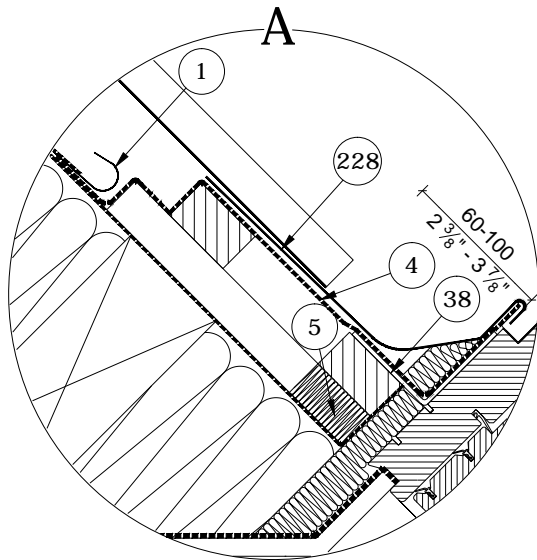
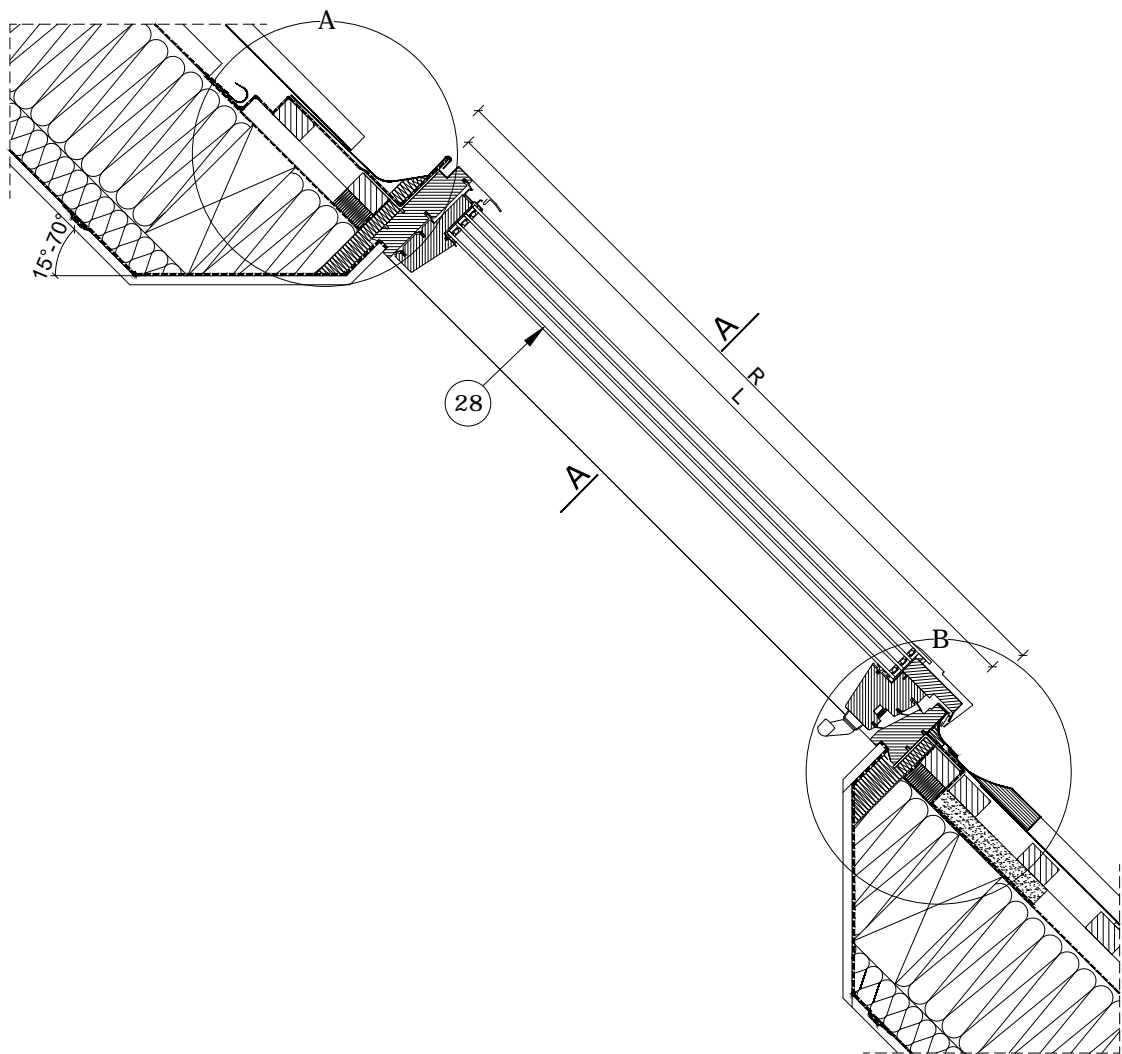


B - B




SEAMED SHEET

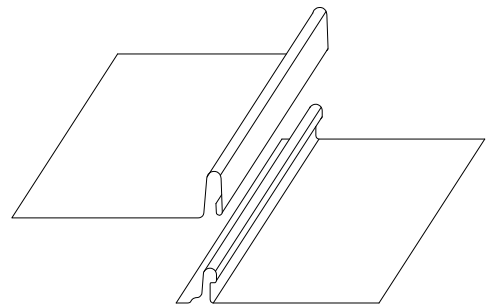

- 1-Water draining gutter FAKRO
4-Exterior Weather & Air Barrier
5-Thermal Insulation
17-Rafter
28-FTT FAKRO pivot window
38-Installation bracket
57-Vertical joining gutter FAKRO
109-Vapor Barrier
227-EBV-AT THERMO flashing side element FAKRO
228-EBV-AT THERMO flashing upper element FAKRO
229-EBV-AT THERMO flashing lower element FAKRO

FTT U8 - DIMENSIONS

Window size[in]	B [in]	B [mm]	L [in]	L [mm]	Rough opening			
					W [in]	W [mm]	R [in]	R [mm]
22x38	21 1/2	547	38 5/8	981	22 1/2	571	39 1/2	1000
30x46	30 3/4	777	46 1/2	1181	32 1/4	817	48	1220
30x55	30 3/4	777	55	1401	32 1/4	817	56 1/2	1440

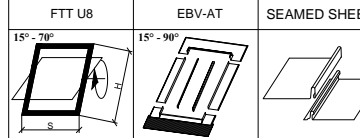

Vertical and horizontal cross-section:
FTT U8 roof window with EBV-AT THERMO
flashing for flat tiled roofs (SEAMED SHEET)

FORMAT: A3	SCALE: 1:10/1:5	DATE: 10.2022
---------------	--------------------	------------------

Warning! The present drawing is for informational-demonstrative purposes only and as such cannot constitute a basis for performance. All dimensions presented in this drawing should be verified on site. Because of the fact that the drawing is a schematic one, FAKRO shall not assume any responsibility for the actual installation quality on the roof. This drawing is FAKRO's property and cannot be published or used publicly without our written consent.